

Koehler
THERMAL PAPER

KT 75 LPF



Application:


Self-adhesive labels, tickets, account statements

Description:

- medium dynamical sensitivity
- 12 years durability at correct storage for thermal paper
- improved stability against environmental influences
- produced without using phenols

Physical Properties	Value	Test Method
Substance	76 g/m ² ± 3 g/m ²	ISO 536
Caliper (single sheet)	86 ± 4 µm	ISO 534
Smoothness (Bekk, front)	≥ 270 s	ISO 5627
Roughness PPS (1.0 MPa)	≤ 2,0 µm	ISO 8791-4
Brightness (front)	≥ 86 %	ISO 2470
Opacity	≥ 89 %	ISO 2471
Tensile strength MD	≥ 60 N / 15 mm	ISO 1924-2
CD	≥ 35 N / 15 mm	ISO 1924-2
Tensile stretch MD	2,0 ± 1,0 %	ISO 1924-2
Moisture Content (absolute)	5,5 - 6,5 %	ISO 287
Preservation Properties	Optical density after ageing *	Conditions
Heat resistance	≥ 95 %	24h / 50°C
Moisture resistance	≥ 85 %	24h / 40°C 80% RH
Light resistance	≥ 90 %	24h / 16.000 lux

* based on maximum optical density

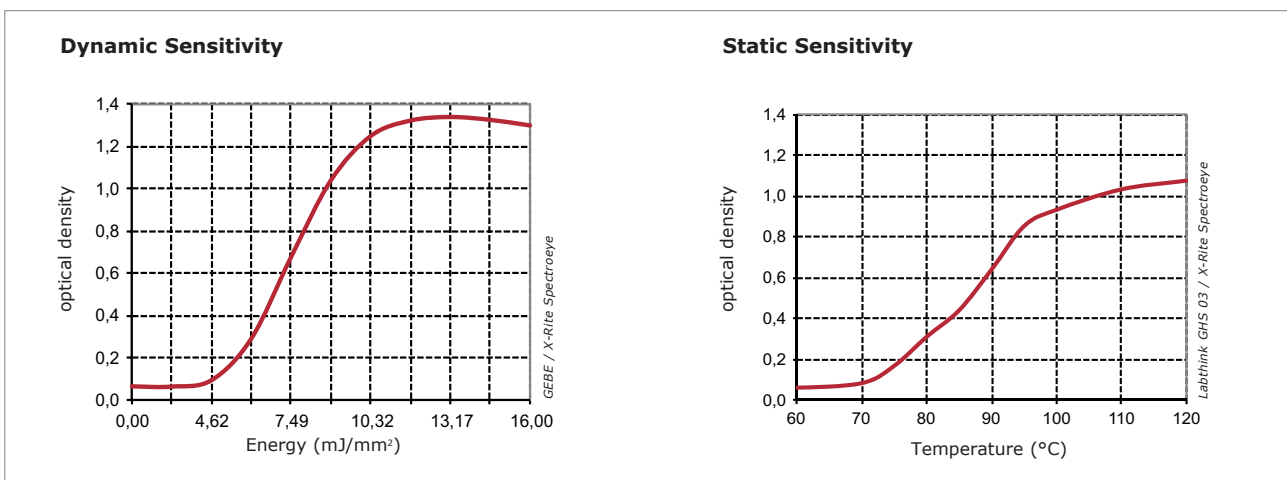

subject to change without notice



Koehler
PAPER

Koehler Paper SE

Hauptstraße 2 · 77704 Oberkirch · Deutschland · Telefon +49 7802 81-0 · Fax +49 7802 81-4330 · www.koehlerpaper.com