


Koehler NexCoat® Banderole

Technical Datasheet

Layer:

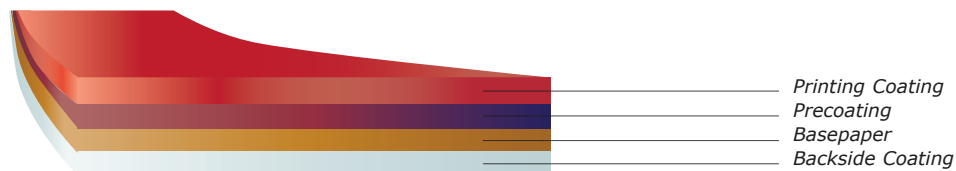

Description: One-side coated glossy paper for yoghurt banderoles

Application: Paper for yoghurt banderoles

Format: Reel

- Features & Benefits:
- High whiteness
 - Smooth surface
 - High dimensional stability
 - Excellent ink and laquer hold out
 - Excellent process reliability

Printing: Especially suitable for rotogravure and flexo printing

Produktspezifikationen:		Standard	Unit			
Substance		ISO 536	gsm	80	90	95
Thickness		ISO 534	µm	72	81	86
Gloss Tappi 75°	TS	ISO 8254-1	%	74	74	74
Bendiung Stiffness	MD	ISO 5628	mN	≥ 48	≥ 68	≥ 80
Tensile Strength	MD	ISO 1924-2	N/15 mm	≥ 62	≥ 66	≥ 75
	CD	ISO 1924-2	N/15 mm	≥ 38	≥ 44	≥ 48
Elongation	MD	ISO 1924-2	%	≥ 1,5	≥ 1,5	≥ 1,5
	CD	ISO 1924-2	%	≥ 4,5	≥ 3,5	≥ 3,5
Bursting Strength Mullen		ISO 2758	kPa	≥ 170	≥ 190	≥ 200

Technical values are informative and subject to production variations. Responsibility for testing the suitability of the product for specific application lies with the purchaser.

Provided suitable and industry-standard storage conditions in the original packaging (dry room climate / adequately protected from cross-contamination), Koehler guarantees the specified mechanical properties for a period of 12 months from the date of shipment ex works